


Nom du projet : _____ Date : _____

Type : _____ Quantité : _____

Dimensions du boîtier

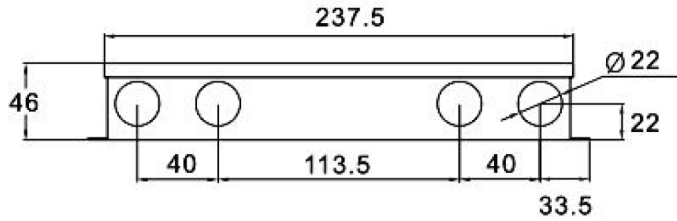

Dimensions du boîtier

Description

Alimentation DEL dimmable avec boîtier de jonction. Peut être installé à l'intérieur.

Spécifications

OUTPUT

DC Voltage	12 Vdc	24 Vdc
Rated Current	25A	12,5A
Current range	0 - 25A	0 - 12,5A
Rated power	300W	300W
Voltage Tolerance	12Vdc +/- 5%	24Vdc +/- 5%

INPUT

Voltage range	100 - 130Vac	100 - 130Vac
Frequency range	47 - 63Hz	47 - 63Hz
Power factory (Typ.)	>0,98	>0,65
Efficiency (Typ.)	88%	88%
AC Current (Typ.)	3,4A / 120 Vac	3,4A / 120 Vac
Dimming (Typ.)	Triac , strong compatibility, flicker-free dimming input	

PROTECTION

Over current	1,2x output, Short Circuit (hiccup mode; auto recovery if fault removed)
Overload	Overload protected @ 120% above peak rating
Over temperature	100 °C ± 10 °C, auto recovery when temperature drops off

ENVIRONMENT

Working temperature	-40 @ 60 °C
Working humidity	20 @ 90% RH
Isolation	1,5K Vac

SAFETY & EMC

Safety Standard	ETL Listed, compliance to EN55015,EN61000-3-2 (>50% load)
EMC Emission	FCC Part 15 B

