

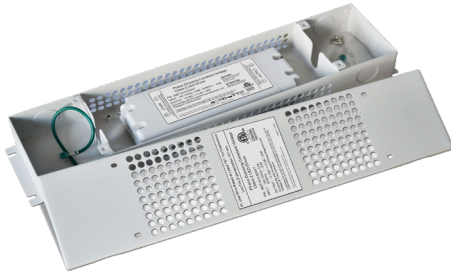


Nom du projet : \_\_\_\_\_ Date : \_\_\_\_\_  
 Type : \_\_\_\_\_ Quantité : \_\_\_\_\_

### Dimensions du driver

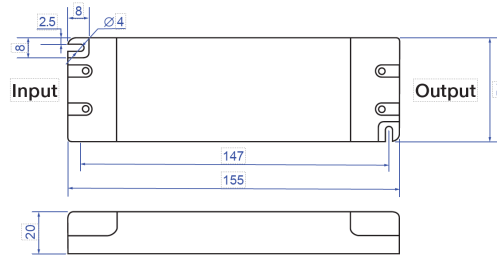

### Dimensions du boîtier

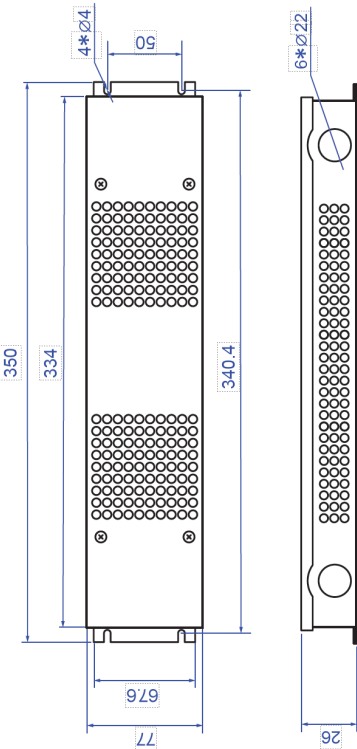

### Description

Alimentation DEL dimmable avec boîtier de jonction. Peut être installé à l'intérieur.

### Spécifications

#### OUTPUT

DC Voltage	12 Vdc	24 Vdc
Rated Current	2,08A	1,04A
Current range	0 - 2,08A	0 - 1,04A
Rated power	25W	25W
Voltage Tolerance	12Vdc +/- 5%	24Vdc +/- 5%

#### INPUT

Voltage range	100 - 130Vac	100 - 130Vac
Frequency range	47 - 63Hz	47 - 63Hz
Power factory (Typ.)	>0,65	>0,65
Efficiency (Typ.)	83%	83%
AC Current (Typ.)	0.42A / 120 Vac	0.42A / 120 Vac
Dimming (Typ.)	Triac , strong compatibility, flicker-free dimming input	

#### PROTECTION

Over current	1,2x output, Short Circuit ( hiccup mode; auto recovery if fault removed )
Overload	Overload protected @ 120% above peak rating
Over temperature	100 °C ± 10 °C, auto recovery when temperature drops off

#### ENVIRONMENT

Working temperature	-40 @ 60 °C
Working humidity	20 @ 90% RH
Isolation	1,5K Vac

#### SAFETY & EMC

Safety Standard	ETL Listed, UL8750+UL1310
EMC Emission	FCC Part 15 B

