



**Features & Benefits**

**Delicate design**

Slim design allows fixtures to be used in a very limited space

**Best-in class performance**

9997 candelas and 3420 lumens( 8°optic, 3000K output)

**Optics and distributions for all occasions**

Very narrow 6°, narrow spot 10°, Medium 15°, Flood 30°, wall graze 15x45°, 10x60°

**Seamless extras**

Integrated optical and mounting accessories

**Shield design**



Shield makes the light throw in one direction and glare free



Spec

<b>Model No</b>	RL-LNWW-36(AK04)
<b>Power Consumption</b>	36W
<b>Dimensions(LxWxH)</b>	1004x45x65mm
<b>Finish</b>	White,black,grey or custom optional
<b>Material</b>	Aluminium body with PMMA lens and tempered Glass
<b>Beam Angle</b>	Monochrome: 10°x45°/60°/20x40°/10x60°
<b>Operation Voltage</b>	100-277VAC
<b>Color Temp</b>	
<b>LED Chip</b>	CREE / Osram
<b>Lumen Output</b>	95lm/w at 3000K
<b>Control</b>	ON/OFF
<b>Fixture Connectors</b>	30cm cable with connectors included
<b>Mounting Options</b>	Swivel Surface Mounted
<b>Operation Temp</b>	-30°C~45°C

Distribution Curve Flux:

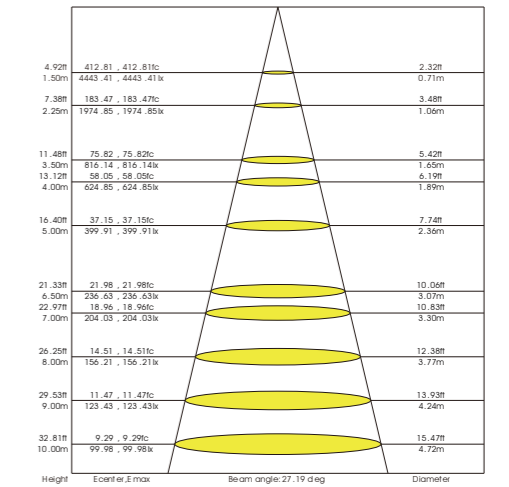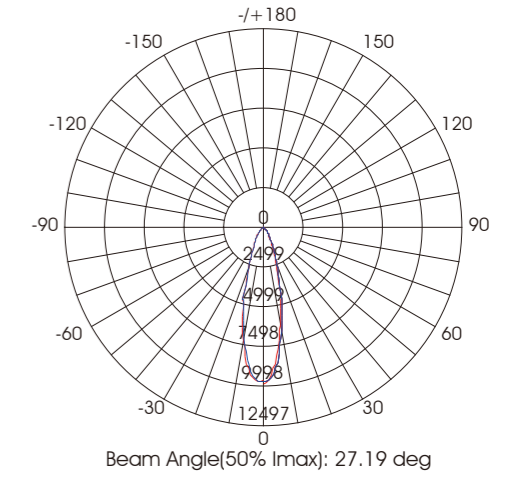

Dimension:

