



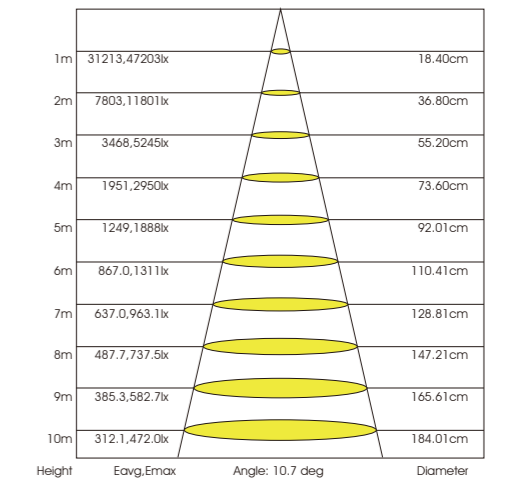

### VENUS Spec

|                           |   |                       |
|---------------------------|---|-----------------------|
| <b>Model No</b>           | <b>RL-LNWW-36(VE)</b>   | <b>RL-LNWW-18(VE)</b> |
| <b>Power Consumption</b>  | 36W   | 18W                   |
| <b>Dimensions(LxWxH)</b>  | 1002x58x111   | 500x58x111            |
| <b>Finish</b>             | White,black,grey or custom optional                             |                       |
| <b>Material</b>           | Aluminium body with PMMA lens and tempered Glass                |                       |
| <b>Beam Angle</b>         | Monochrome: 10° /30°/45°/60°/20x40°/10x60°<br>Asymetric: 20x40° |                       |
| <b>Operation Voltage</b>  | AC100-277V  |                       |
| <b>Color Temp</b>         |   |                       |
| <b>LED Chip</b>           | CREE / Osram  |                       |
| <b>Lumen Output</b>       | 35lm at RGBW full output, 85lm/w at 3000K                       |                       |
| <b>Control</b>            | Triac Dim ON/OFF 0-10V DALI DMXrdm                              |                       |
| <b>Fixture Connectors</b> | 30cm cable with connectors included                             |                       |
| <b>Mounting Options</b>   | Swivel Surface Mounted  |                       |
| <b>Operation Temp</b>     | -30°C~45°C  |                       |

### Distribution Curve Flux:

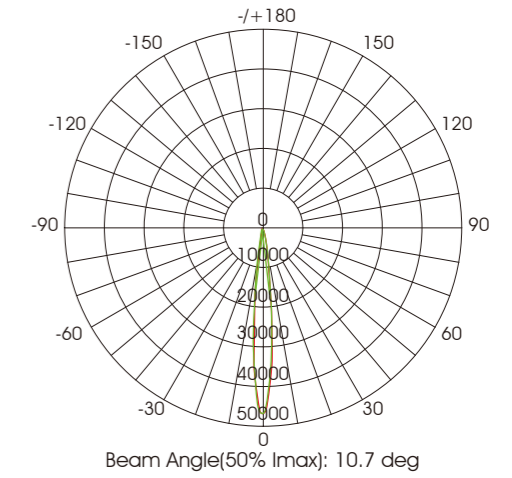

### Dimension:

