
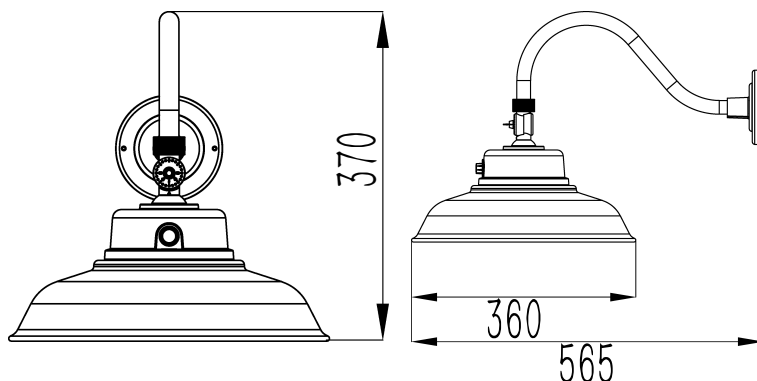


RLBN-BK LED Barn Light

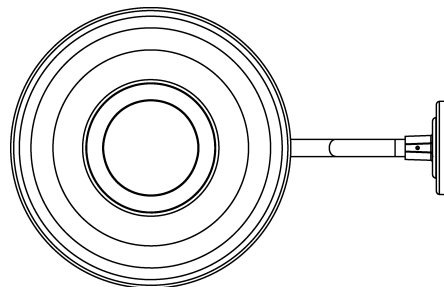

Introduction

The RLBN-BK use AC DOB LED light technology, distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 250W mercury vapor luminaire while saving 70% in energy costs. The BL300 Series eliminates frequent lamp and ballast replacements associated with traditional technologies. Can be wall or post mounted with integral bracket or onto 1-5/8" mast arm.

ORDERING INFORMATION

Model	Power	Color	FINISH
RLBN	40W	3000K 4000K 5000K	BK Black Customize finish available

ELECTRICAL SYSTEM

- Input Voltage: 120V/240/277V 50/60Hz
- Power Factor : > 0.99 at full load
- Total Harmonic Distortion: < 15% at full load
- Luminaire is qualified to operate at ambient temperatures of -40°C to +50°C.

Notes

- Photocontrol (PE) requires 120/240/277 voltage or short cap optional.
- Features an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Gray, silver, black, bronze, platinum bronze, white and so on are available.

INSTALLATION

Easily mounts to a wooden post or pole using 2" lag screws, included. Compatible with 1-5/8" mounting arm, sold separately.

REGULATORY & VOLUNTARY QUALIFICATIONS

- ETL Listed.
- Suitable for wet locations.
- Certified to ANSI C136.31-2001, 3G vibration standards.
- 2.5kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2.
- Meets FCC Part 15 standards for conducted and radiated emissions.
- Luminaire and finish endurance tested to withstand 3,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117.
- RoHS compliant. Consult factory for additional details.

WARRANTY

- 5 years limited warranty is standard on luminaire and components.

RLBN-BK Performance Data


Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of enduser environment and application. Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%. Contact factory for performance data on any configurations not shown here.

MODEL	LEDS	LED CURRENT	RATED WATTS	30K(3000K,70CRI)		40K(4000K,70CRI)		50K(5000K,70CRI)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
RLBN	192	50mA	40W	4800	120	4800	120	4800	120

Photometric Diagrams

To see complete photometric reports or download .ies files for this product Isfootcandle plots for the BL301D.Distances are in units of mounting height (15')



Electrical Data

MODEL	LEDS	LED CURRENT	SYSTEM WATTS	Current		
				120	240	277
RLBN	192	50mA	40W	0.33	0.16	0.14

Lumen Ambient Temperature (LAT) Multipliers

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Luminaire Lumen Maintenance Factors (LMF)

Data references the extrapolated performance projections for the platforms noted in a25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	75000	100000
Lumen Maintenance Factor	BL301 192 LED 0.05A				
	100%	96%	94%	92%	90%